

AquaRite® + SV



3 STANDARD **4TH** 8000 HOURS



EXCELLENT VALUE FOR MONEY

- **One single box for salt chlorination and pool equipment regulation and control**
(including filter pumps, heat pumps, lighting, etc.)
- **Wifi / Ethernet module (optional):** simple, trouble-free remote management
- **Automatic salt concentration calculation**
- Clean water at all times: **saves on chemicals** and offers unrivalled bathing comfort
- **Transparent cell** to enable a visual check of the production.
- Gas sensor included.



INCLUDED

Cl Production

DISPLAY
TFT

Up to 50W

pH

C°

+4
Control of the 4
auxiliary outputs

Control of
filtration and
VS pumps

Modbus

WATER TREATMENT

OPTIONS AVAILABLE

Description	AQR-PLUS-SV16ST	AQR-PLUS-SV22ST	AQR-PLUS-SV33ST	AQR-PLUS-SV50ST
Redox probe kit as standard			E-OPTION-REDOX	
Free chlorine amperometric probe			H-OPTION-CL	
Free chlorine membrane probe			H-OPTION-CL2	
WiFi module			RS3WI-OPTION-W	
Ethernet module			RS3NET-OPTION-L	
Detachable touch screen			CTS-OPTION-TS	
Detachable TFT screen			AQR-PLUS-PANL	
Acid tank detection			AQR-PLUS-CANNE	



pH kit as standard



Redox probe kit as standard



Temperature kit



Free amperometric probe



Free chlorine membrane probe



WiFi module



Ethernet module



Detachable touch screen



Detachable TFT screen



Flow switch included



AquaRite® + SV


AQUARITE® + SV

Description	AQR-PLUS-SV16ST	AQR-PLUS-SV22ST	AQR-PLUS-SV33ST	AQR-PLUS-SV50ST
Maximum production Cl ₂ /h	16 gr	22 gr	33 gr	50 gr
Salt concentration	From 3 gr up to 100 gr Na/Cl			
Language selection	GB - FR - SP - DE - IT - CZ - PT - NL - PL - HU - RU			
Pool volume	75	100	150	200
Display	2.8" TFT			
Alimentation	220V 50/60Hz			
Dimensions	270 x 220 x 115 mm			
Electronic box	Fireproof black ABS plastic			
Front cover	White ABS plastic			
Output	8-15A	8-20A	10-15A	35-45A
Consumption	120W	160W	150W	360W
Principal control outputs	Filtration time / Light / Temperature			
Additional control outputs	4 additional user-configurable outputs			
pH control	Yes - Chip, pH probe, probe holder, peristaltic pump 1,5 L/h			
Temperature control	Yes			
Automatic cleaning	Operates by reverse polarity			
Salinity reading via WiFi/Ethernet	Salinity detected in g/l (accuracy +- 10%)			
Pool cover	Programmable 0 – 100% production as a function of pool cover being open or closed			

TRANSPARENT CELL

Description	AQR-PLUS-SV16ST	AQR-PLUS-SV22ST	AQR-PLUS-SV33ST	AQR-PLUS-SV50ST
Electrolysis cell	4 Titanium cell plates MONOPOLAR	5 Titanium cell plates MONOPOLAR	7 Titanium cell plates MONOPOLAR	10 titanium plates MONOPOLAR
Minimum flow	5 m ³ /h	7 m ³ /h	9 m ³ /h	9 m ³ /h
Dimension cell plates	200 x 45 mm	200 x 45 mm	200 x 45 mm	400 x 45 mm
Material cell housing	Plastic PVC transparent			
Cell fastener	Thread for an easy installation			
Diameter tube connection	63 mm			
Dimension cell	355 x 305 x 305 mm			
Cell cable size	(3 x 4) x 1.5 m			
Gas sensor	Included in the cell			Flow switch
Flow switch	Included			
Maximum pressure	4 kg/cm ²			
Maximum temperature	45°C			

CONNECTIVITY

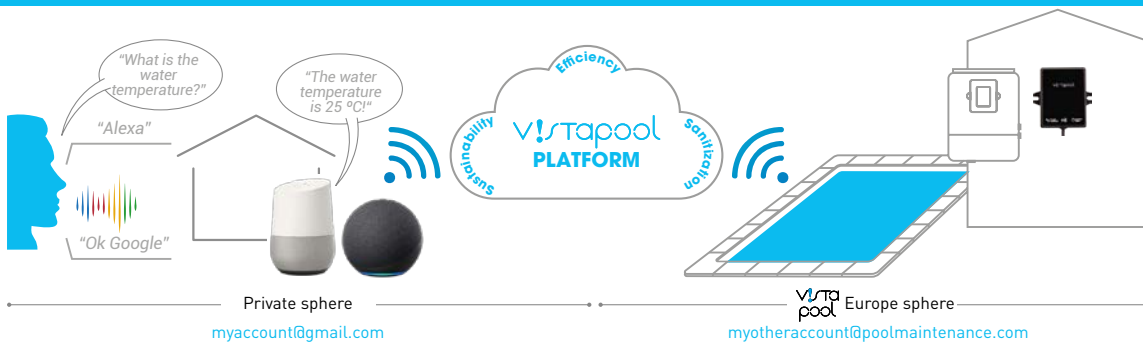

Watch the video

* AquaRite® UV LS / AquaRite® + / AquaRite® Flo Advanced / Control Station

Control all your pool equipment with Alexa and Google Assistant*